


PCB SIZES FOR 6U SUBRACKS

6U Subracks will accept 233,34mm Eurocards vertically and will also accept PCBs suitable for 3U subracks by fitting a subrack divider accessory kit. PCB depths are indicated in the table below, please note that where EMC is required, the TYPE 3 Subrack will only accept Board depths less than the overall depth of the subrack.

6U x 84HP
Type 1 DIN 41612

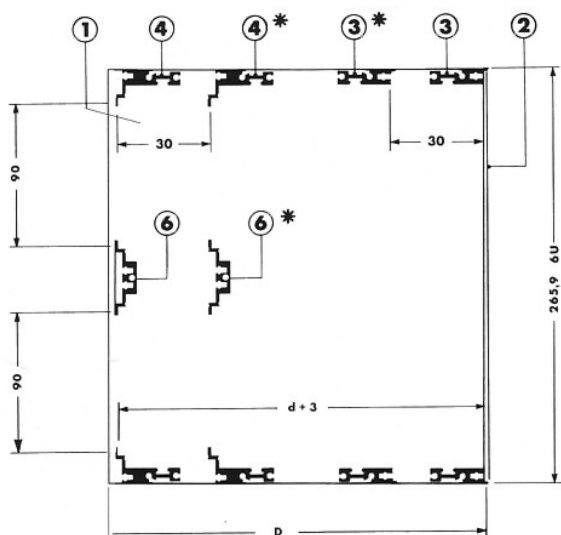


* Indicates alternative positions

Supplied in kit form comprising:

Ref	Description	Qty
1	Sideplate	2
2	T-Front Plate	2
3	Front Horizontal Rail	2
4	Connector Mounting Rail	2
6	Centre Connector Mounting Rail	1
	Screws M5 x 12mm, Pan Hd	10

6U x 84HP
Type 2 & Type 3 MOTHERBOARD

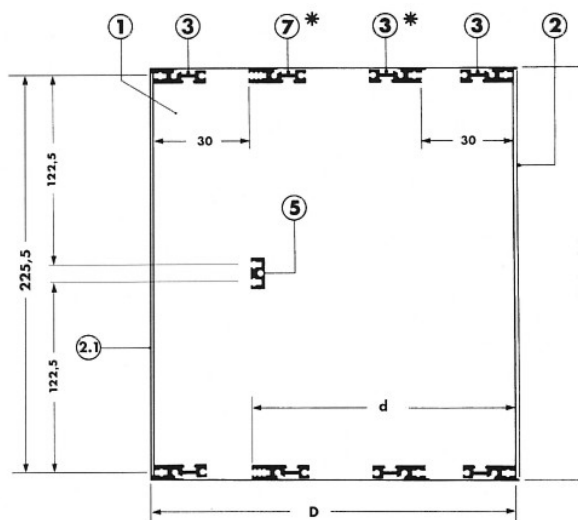

* Indicates alternative positions

Supplied in kit form comprising:

Type 2 Type 3

Ref	Description	Qty	Qty
1	Sideplate	2	2
2	T-Front Plate	2	2
2.1	Closing Angle	-	2
2.2	Infill Panel 3U	-	4
3	Front Horizontal Rail	2	4
5	Centre Rail	1	1
7	Rear Horizontal Rail	2	2
	Screws M5 x 12mm, Pan Hd	10	14

ORDER CODES 6U SUBRACKS

WIDTH	SUBRACK TYPE	PCB DEPTH =		
		160	220	280
		D = 170	230	290
		d = 172,3	232,3	292,3
84HP	TYPE 1	-----	97253C	97255X
	TYPE 2	-----	97254A	97256H
	TYPE 3	-----	97398X	97399H
				97257R
				97258G
				97400R